




Well Manager® for Crawl Space Applications

Overall Size 71.25"L x 37" W x 39"H

WM210CPLH-50LPC

Amazing Performance From Unbelievably Poor Wells When height is a problem

- ✓ Patented in the US & Canada
- ✓ Uses your existing well pump
- ✓ Will fit in 39" high crawl space
- ✓ Complete self contained Well Management System use on wells that produce as little as 1/10th gpm
- ✓ Easy to install slide into place, pipe inlet, outlet, make wiring connections and it turn on
- ✓ Expand storage easily by connecting additional tanks only 26.5" high
- ✓ Provide Consistent Pressure every bit as impressive as city water
- ✓ Remarkably Quiet
- ✓ Rectangular Storage Tanks of PE resin meeting FDA regulation 21 CFR 177.1520 © 3.1 & 3.2, extra heavy walled tanks made to last
- ✓ Tanks come with everything installed on them:
 - Well Manager Nema 4 dual voltage 120/240V UL/cUL Listed control panel for 1 or 2 wells built to industrial standards installed on the tank – end or side mount available
 - All penetrations water tight
 - Low water cut off protects pressure pump installed in tank
 - Flow Detector protects well pump
 - Timing control protects well from overpumping
 - Everything can be unbolted from tank
 - Tank level controls pass NSF 61 Potable Water
 - 230V pumps draw 5.5 amps; 115 volt units draw 11.0 amps
 - All but 3" of stored water usable
 - Overfill Shutoff with manual reset stops overflows
 - Tank air vent filtered
 - 1" inlet & outlet
- ✓ All field wiring connections by wire nut in one box
- ✓ Service or replace pump without draining tank
- ✓ Installation, set up and maintenance Manual
- ✓ Many options available see back

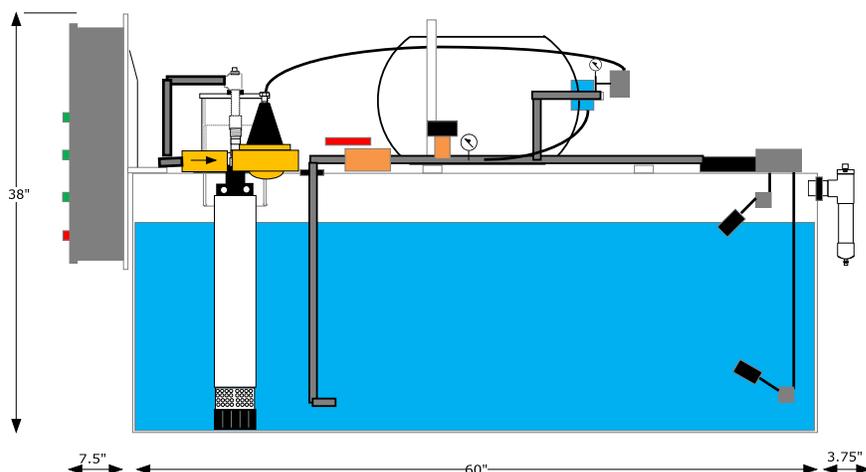

WM210CPLH-50LPC

Overall dimensions 71.25"L x 37"W x 38"H

This packaged unit requires less head room than anything else on the market and the pump can be removed with the system installed in a 39" high crawl space.

Electrical requirements:

Systems with 115 volt pressure pump: one 230V 20 amp circuit (generally the existing well pump circuit), one 15 amp 115V circuit
Systems with 230V well & pressure pump: two 230V 20 Amp circuits, one 115 V 15 amp circuit.

Everything will unbolt from the tank so the pieces can be moved through smaller openings into the crawl space where they can be reassembled. Works on very poor wells and delivers great pressure.

Available Through:

Made in the USA by Reid Plumbing Products LLC

317 Route 31N, Hopewell, NJ, USA 08525

800-211-8070 from the USA & Canada +1 609-466-4347 Elsewhere

Fax 609-466-3982

www.wellmanager.com

When height is a problem - More Storage In Less Space

Rectangular tanks permit larger storage capacities in less floor space than round tanks. Several tanks can be assembled to provide generous storage even in a crawl space.

When you do not have a lot of height, these horizontally configured systems are the answer. They measure 37" W x 71.25" long x 39" High with everything mounted on the tank. In a pinch, everything unbolts so you can put them through small openings 26.5" x 37" and then reassemble the system when you get it in place.

Increase Storage by Adding Tanks

Matching storage tanks are only 26.5" to the top of the lid. Connecting manifolds are available

Spray Boom Fill

A Spray Boom Fill can reduce or remove sulfur odors, and gasses like, H₂S, Oxygen, CO, CO₂, Methane, natural gas and Radon without chemicals or additional mechanical equipment. This reduces the space required for treatment equipment and uses less energy than other treatment methods.

Using a Spray Boom Fill for odor, flammable gas or Radon removal requires the addition of a power vent to the exterior of the building.



WM210CPLH-50LPC 39" High



WM210CPH 49" High



Unit with a spray boom and blower that runs as tank is filling



WM210CPV with extra tanks 74" High

Pump Installed	Delivery Rates at Outlet of CP Models										
	@35 PSI	@40 PSI	@45 PSI	@50 PSI	@55 PSI	@60 PSI	@65 PSI	@68 PSI	@72 PSI	@75 PSI	@80 PSI
½ HP 10 GPM 120 V	13	12.5	12	11.0	9.0	8.0	4.25	1.5	Off		

Table shows flow rates through a CP Module. Flows through your pressure tank in non CP models will be higher.

Options



Remote Tank Level Indicator

24 volt display can be mounted in laundry, kitchen or next to the door to the garage. Comes wired with plug-in pigtail



Stop Loss Control

Water the lawn but hold enough reserve for your shower or prevent running toilets from emptying your tank. Order with a system and we install it on the tank.



2 Channel Notifier

Calls one or several people of your choice. A voice tells them where it is calling from and what the problem is! Turn off alarm from your phone and listen in to noises in mechanical spaces



Spray Boom Fill

Sprays the water from your well into the tank and reduces or eliminates dissolved gas like methane and Radon. Eliminates rotten egg odors. No chemicals needed.